


Layer 2 Bottom




www.silicon.com.ua
download player




Bot Silk

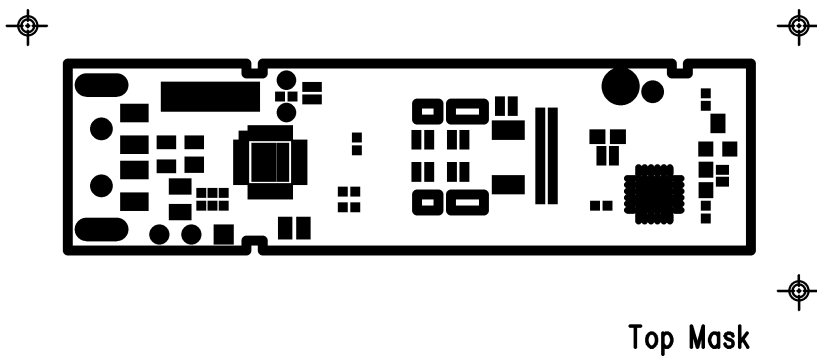

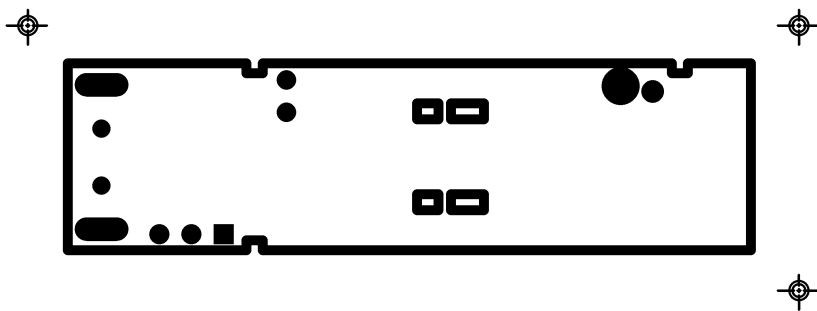


Bot Mask

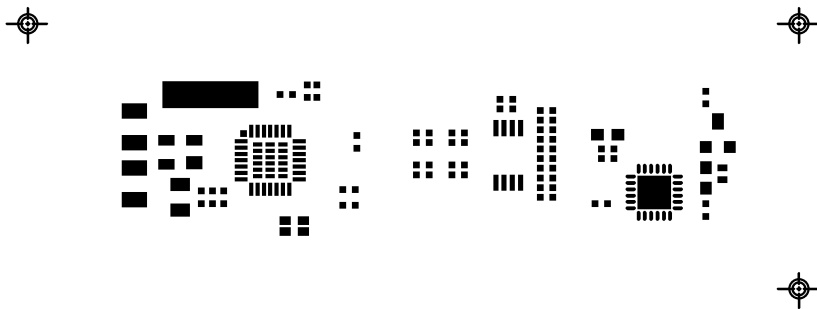

Top Paste



SIZE	QTY	SYM	PLTD
10	102	U	PLTD
93	1	V	PLTD
29	2	W	PLTD
35	3	X	PLTD
61	2	Y	NPLTD
40	5	Z	PLTD
40 x 98.43	2	Z	PLTD

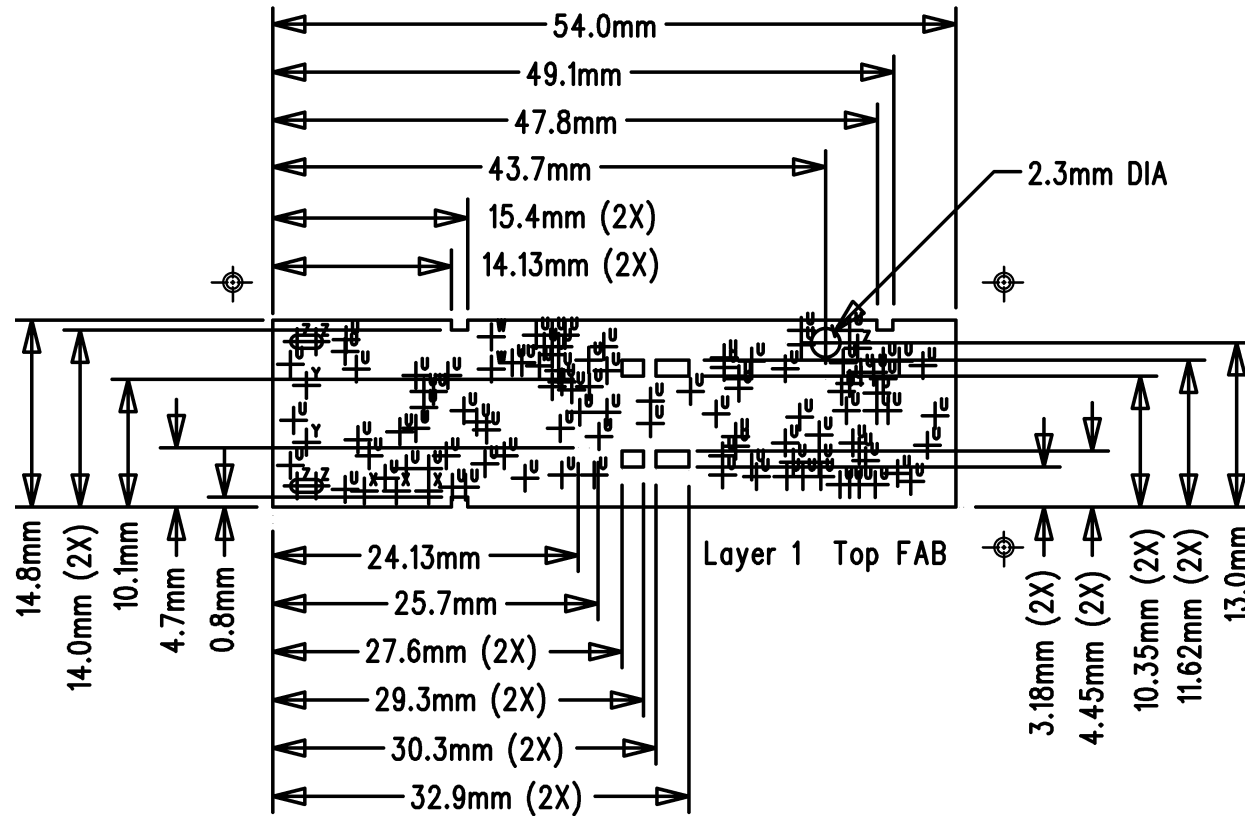

NOTES : UNLESS OTHERWISE SPECIFIED

- BOARD TO BE MANUFACTURED AND INSPECTED PER IPC STANDARD IPC-6012A.
- ALL ANULAR RINGS .005" MINIMUM PER IPC STANDARDS.
- ALL HOLE DIMENSIONS APPLY AFTER PLATING.
- BOARD WARPAGE .01" PER INCH MAXIMUM.
- TRACE METAL 1 OZ. COPPER MIN. TOP AND BOTTOM.
- TRACE FINISH TO BE SOLDER MASK OVER BARE COPPER, WITH HOT AIR LEVELED SOLDER.
- SOLDER MASK - RED LPI.
- HOLE LOCATIONS PER PROVIDED DRILL DATA.
- LEGEND - USE PROVIDED SILKSCREEN ARTWORK WITH WHITE EPOXY INK.
- ALL DRILL HOLE TOLERANCES ARE ± 0.003 " UNLESS OTHERWISE NOTED.
- NO VENDOR MARKINGS OR ALTERATIONS SHALL BE PERMITTED ON ANY METAL OR SILKSCREEN LAYERS.
- BOARD THICKNESS SHALL BE $.031" \pm .010"$.